

# Technical Manual

## Multi-Storey External Walls

February 2016, Version 1.0



**FASTER.  
BETTER.  
STRONGER.**

**Pronto Panel™**





# Pronto Panel™

# Technical Manual

# Contents

## **Introduction**

Building with Pronto Panel	5
Benefits	6

## **System Information**

Compliance and Quality	8
Scope and Applications	9
Product Range	10
Material Properties	11
Structural Properties	12
System Details	20

## **Installation Details**

Delivery on Site	35
Pronto Panel Safety	35
Installation	36

## **Warranty** 42

## **Associated Companies** 43



# Pronto Panel Introduction



# Building with Pronto Panel

**Pronto Panel** is a lightweight concrete composite panel suitable for use as external cladding system. The non-load bearing panel system has been designed and tested to Australian conditions and satisfies Australian Standards and the National Construction Code. Pronto Panel is durable, lightweight and simple to assemble, making it perfect for multi-storey projects.




# FASTER. BETTER. STRONGER.


## The benefits stack up




Lightweight



Durable



Fast and simple  
installation




Exceptionally low  
water permeability




Effective  
acoustic insulation




High fire  
resistance



High pull-out  
strength




Minimal  
components



Exceptional lateral  
load capacity





# Pronto Panel System Information

# Compliance and Quality

## Peace of mind

To provide peace of mind when using Pronto Panels, extensive testing has been undertaken and strict quality control measures have been put in place to ensure the panels meet the design and construction requirements for the Australian market.

## CodeMark™ Certification

CodeMark is a building product certification scheme. The CodeMark scheme supports the use of new and innovative building products by providing a nationally and internationally accepted process for products to be assessed for compliance with the requirements of the building codes of Australia and New Zealand. The scheme provides confidence and certainty to regulatory authorities and the market through the issuing of a Certificate of Conformity.



## National Construction Code

Pronto Panel meets the provisions of the NCC Performance Requirements as an Alternative Solution, specified in clause A 0.5 of the NCC. In accordance with clause A 0.10 the relevant deemed to satisfy provision, it has been identified for structural adequacy, fire resistance and acoustic performance. Thorough testing has been conducted to verify these requirements using registered testing authorities and expert judgement by professional engineers.

## Quality

Pronto Panel is manufactured under licence by a company with full ISO 9001 accreditation. This ensures that all materials, processes, quality control and quality assurance are rigorously checked and verified.

Pronto Panel has achieved CodeMark Certification, an independent accreditation to further ensure the quality and consistency of the product.

Pronto Panel has numerous quality checks, both during manufacture and before dispatch, to ensure only the highest quality product reaches the market.

Each batch of Pronto Panel can be traced and verified by its batch number to its original raw materials.

## Intention

This manual is intended to be used by experienced and qualified builders, engineers and architects. No responsibility is taken for inappropriate, incomplete and incorrect use of the information in this manual.



# Scope and Applications

Pronto Panel is an external façade system designed for framed structures, ranging from single storey to multi-storey construction. Pronto Panel thermal properties, as well as details for fire resistance for wall system combinations, are outlined in this manual. Details of support and fixing for various wind conditions have also been provided.

This manual contains various construction details, as well as guidance on installation of Pronto Panels. Pronto Panel installation must be carried out by qualified panel installers. No responsibility is taken for incorrect installations of Pronto Panels.




Pronto Panel Technical Manual

# Product Range

## Pronto Panel

Pronto Panel comes in various lengths.

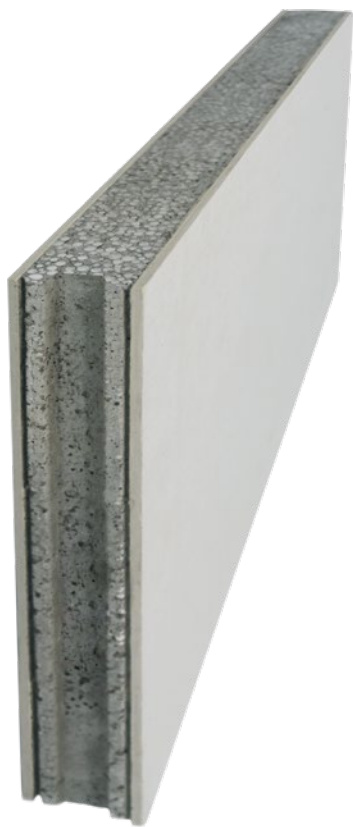

Panel size (mm) ( L x W x T)	Dimensional Tolerance (mm)	Mass (kg)	Mass Tolerance (kg)
2,440 x 610 x 60	±5	77	±5
2,700 x 610 x 60	±5	85	±5
2,850 x 610 x 60	±5	90	±5
3,000 x 610 x 60	±5	95	±5

## Pronto Panel Adhesive

Pronto Panel Adhesive comes in 20kg bags.



Pronto Panel Technical Manual

# Material Properties

Pronto Panel consists of a composite of lightweight aggregates bonded into a cementitious matrix. The panels are sheeted with a Calcium Silicate board. The panels have been designed in such a way that they can be cut to size on site as required, without compromising its structural capacity.


Pronto Panel Material Properties

Properties	Value
Working Density	52kg/m <sup>2</sup>
Dry Density	770kg/m <sup>3</sup>
Water Absorption	<5 %
*R-Value	0.253m <sup>2</sup> .K/W

\*The panel is tested in accordance with the Australian and New Zealand Standard AS/NZS 4859.1.

See Thermal Properties' section for system R value.

3D Panel Detail

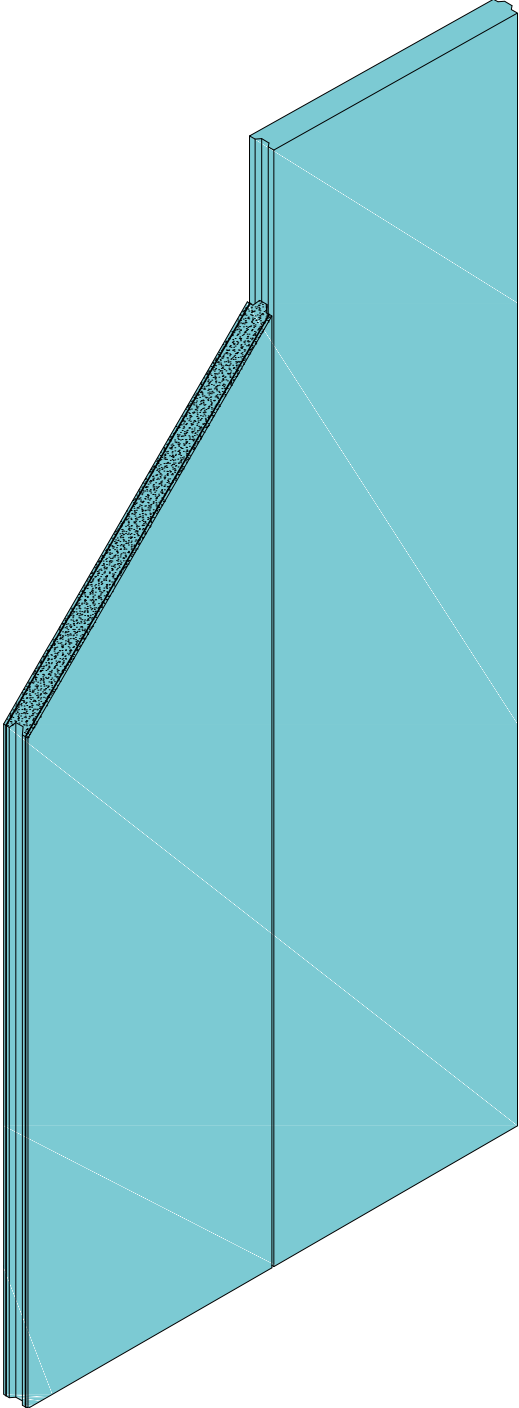



# Structural Properties

Pronto Panel can be used as a non load-bearing façade where by vertical Pronto Panels are fastened onto horizontal lightweight structural top hats. As a façade, Pronto Panel would come in contact with various environmental factors. These factors include imposed wind action, wet weather, bush fire and heat transference. Extensive testing has been undertaken to ensure that the façade constructed using Pronto Panels performs in accordance with Australian Standards.

## 1. Weathertightness

The weathertightness of façade systems has become a vital part of construction in recent years. Pronto Panel has undergone a full scale water penetration test in accordance with AS 4284 at CSIRO. It was found that the system, with the prescribed construction details, could maintain watertightness up to the serviceability requirements for a category 2 cyclone.


Pronto Panel acts as an excellent rain screen as the panel itself is not water permeable. Also when external wind pressure acts upon the Pronto Panel façade, the weep holes in the façade system reduce the pressure differential between the cavity of the panel and the external environment, thus prevent the ingress of water into the cavity.



## 2. Wind Load

Pronto Panel was subject to a 4 point bending test, pull out test and shear test at the University of Newcastle. The test results have been used to determine the batten and screw requirements of the

Pronto Panel System in different wind categories. It is assumed that the internal plasterboard linings do not contribute to the strength of the system.

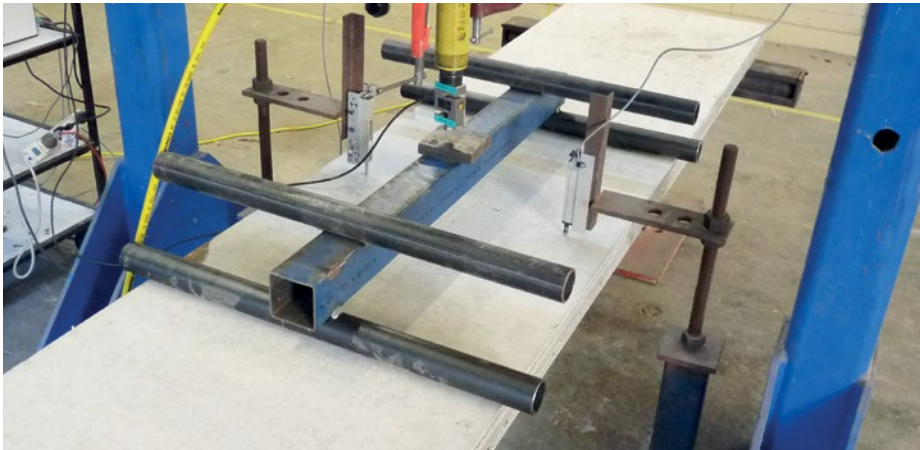

# Structural Properties

## 2. Wind Load

When correctly installed, Pronto Panel is suitable for use in buildings subjected to design wind speeds as defined in AS 4055. The Pronto Panel System is able to perform in wind zones up to and including N5 and C3. The following tables show the number

of top hats that are required per panel and the number of screws per panel. In all cases the strength of the supporting structure must be independently confirmed as sufficient to support the Pronto Panel System.

It's the designers responsibility to nominate whether to use 24mm or 50mm top hat batten.

### Panel supported at base

Number of top hats per panel

Wind Category	Ultimate Wind Pressure (kPa)		Stud Spacing (mm)	Number of top hats per Panel							
				Panel Length (mm)							
	Away from Corners	Within 1200mm of Corners		≤2440		≤2700		≤2850		≤3000	
				Panel Location							
				(Typical)	(Corner)	Typical	Corner	Typical	Corner	Typical	Corner
N1	+0.62/-0.53	-0.94	450/600	3	3	3	3	4	4	4	4
N2	+0.86/-0.74	-1.30	450/600	3	3	3	3	4	4	4	4
N3	+1.35/-1.16	-2.03	450	3	3	3	3	4	4	4	4
			600	3	4	3	4	4	4	4	4
N4	+2.01/-1.72	-3.01	450	3	4	3	5	4	5	4	5
N5	+2.96/-2.53	-4.44	450	4	4	5	5	5	5	5	5
C1	+1.80/-1.80	-2.70	450	3	3	3	3	4	4	4	4
			600	3	4	3	4	4	4	4	4
C2	+2.68/-2.68	-4.02	450	3	4	3	5	4	5	4	5
C3	+3.94/-3.94	-5.91	450	4	4	5	5	5	5	5	5

#### Notes:

1. 24mm or 50mm top hat batten (Min. 0.42 BMT)
2. Top hat max. 250mm from end of Pronto Panel



## 2. Wind Load

### Panel supported at base

Number of screws per panel per top hat

Wind Category	Ultimate Wind Pressure(kPa)		Stud Spacing (mm)	Number of Screws per Panel per top hat			
				Panel Location			
	Away from Corners	Within 1200mm of Corners		Typical		Corners	
N1	+0.62/-0.53	-0.94	450/600	2	2	2	2
N2	+0.86/-0.74	-1.30	450/600	2	2	2	2
N3	+1.35/-1.16	-2.03	450	2	2	3	3
			600	2	2	2	2
N4	+2.01/-1.72	-3.01	450	2	2	2	2
N5	+2.96/-2.53	-4.44	450	2	2	3	3
C1	+1.80/-1.80	-2.70	450	3	3	4	4
			600	3	3	3	3
C2	+2.68/-2.68	-4.02	450	4	4	3	3
C3	+3.94/-3.94	-5.91	450	3	3	4	4

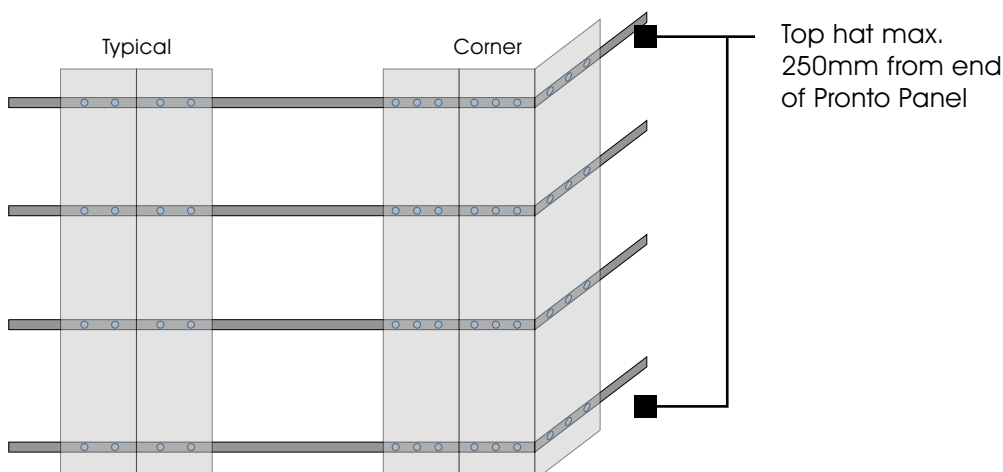


Illustration of top hat and screw requirements on 3m Pronto Panels supported at base with 450mm stud spacing in a N3 wind region

# Structural Properties

## 2. Wind Load

### Panel suspended from batten

Number of top hats per panel

Wind Category	Ultimate Wind Pressure (kPa)		Stud spacing (mm)	Number of top hats per Panel							
				Panel Length (mm)							
	Away from Corners	Within 200mm of Corners		≤2440		≤2700		≤2850		≤3000	
				Panel Location							
				(Typical)	(Corner)	Typical	Corner	Typical	Corner	Typical	Corner
N1	+0.62/-0.53	-0.94	450/600	4	4	4	4	4	4	4	4
N2	+0.86/-0.74	-1.30	450/600	4	4	4	4	4	4	4	4
N3	+1.35/-1.16	-2.03	450/600	4	4	4	4	4	4	4	4
N4	+2.01/-1.72	-3.01	450	4	4	4	4	4	5	4	5
N5	+2.96/-2.53	-4.44	450	4	5	5	6	5	6	5	6
C1	+1.80/-1.80	-2.70	450	4	4	4	4	4	4	4	4
C2	+2.68/-2.68	-4.02	450	4	4	4	4	4	5	4	5
C3	+3.94/-3.94	-5.91	450	4	5	5	6	5	6	5	6

#### Notes:

1. 24mm or 50mm top hat batten (Min. 0.42 BMT)
2. Top hat max. 250mm from end of Pronto Panel

## 2. Wind Load

### Panel suspended from batten

Number of screws per panel per top hat

Wind Category	Ultimate Wind Pressure(kPa)		Stud Spacing (mm)	Number of Screws per Panel per top hat			
				Panel Location			
	Away from Corners	Within 1200mm of Corners		Typical		Corners	
	(Typical)	(Corner)		Ends	Middle	Ends	Middle
N1	+0.62/-0.53	-0.94	450/600	2	2	2	2
N2	+0.86/-0.74	-1.30	450/600	2	2	2	2
N3	+1.35/-1.16	-2.03	450/600	2	2	2	2
N4	+2.01/-1.72	-3.01	450	2	2	3	3
N5	+2.96/-2.53	-4.44	450	3	3	3	3
C1	+1.80/-1.80	-2.70	450	2	2	3	3
C2	+2.68/-2.68	-4.02	450	3	3	4	4
C3	+3.94/-3.94	-5.91	450	4	4	4	4

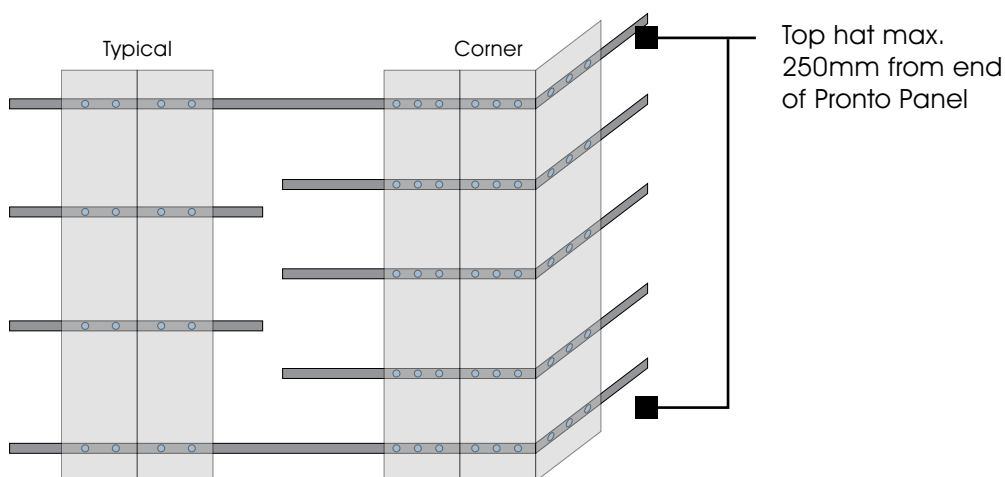


Illustration of top hat and screw requirements on 3m Pronto Panels suspended from batten with 450mm stud spacing in a N4 wind region



# Structural Properties

## 3. Fire resistance

When used as a façade, Pronto Panel has shown to be able to satisfy all six Bush Fire Attack Levels including BAL-FZ (Flame Zone) for external cladding in accordance with AS3959. Pronto Panel has under gone a full-scale fire test in accordance with AS1530.4 where by it achieved a FRL of -/60/60. During the test, a 3m x 3m wall built from Pronto Panels was exposed to a temperature over 1000°C.

Pronto Panel is also deemed as a non-combustible material as determined by testing in accordance with AS1530.1 for combustibility of material. In the test, Pronto Panel was exposed to heat flux in a controlled chamber, during which no flame was observed.

BAL	Description	Requirement for External Walls	Pronto Panel
Low	Minimum attack from radiant heat and flame. Some attack by burning debris is possible.	No special construction requirements.	✓
12.5	Attack by burning debris is significant with radiant heat not greater than 12.5kW/m <sup>2</sup> . Specific construction requirements for ember protection and accumulation of debris are warranted.	Non-combustible material required to base of external walls up to 400mm above ground or decks.	✓
19	Attack by burning debris is significant with radiant heat not greater than 19kW/m <sup>2</sup> . Specific construction requirements for embers and radiant heat are warranted.	Non-combustible material required to base of external walls up to 400mm above ground or decks.	✓
29	Attack by burning debris is significant with radiant heat not greater than 29kW/m <sup>2</sup> . Specific construction requirements for ember and higher radiant heat are warranted. Some flame contact is possible.	Non-combustible material	✓
40	Radiant heat levels and flame contact is likely to significantly threaten building integrity.	Non-combustible material or tested for bushfire resistance to AS 1530.8.1	✓
FZ (Flame Zone)	Significant radiant heat and significant higher likelihood of flame contact from the fire front will threaten building integrity.	Non-combustible material with a minimum thickness of 90mm or an FRL of -/30/30 when tested from outside or to be tested for bushfire resistance to AS 1530.8.2	✓

## 4. Thermal Properties

Pronto Panel have been designed to provide excellent thermal performance when used as a system with wall wrap, insulation and plasterboard.

The following systems are based on 60mm Pronto Panels with 90mm studs, single sided reflective wall wrap, 10mm plasterboards and 24mm top hats.


System	Components	R value (m <sup>2</sup> .K/W)	
		Winter	Summer
1	Pronto Panel + Top hat + Wall Wrap + R2.5 Wall Batts + plasterboard	3.285	3.015
2	Pronto Panel + Top hat + R2.5 Wall Batts + plasterboard	3.081	2.828
3	Pronto Panel + Top hat + Wall Wrap + R1.5 Wall Batts + plasterboard	2.234	2.065
4	Pronto Panel + Top hat + R1.5 Wall Batts + plasterboard	2.030	1.878
5	Pronto Panel + Top hat + Wall Wrap + plasterboard	0.658	0.641

# System Details

The details in the following sections show the common junctions of the Pronto Panel walls with other building elements, such as concrete floors and soffits, and intersections of walls.

*The details in this manual are for illustration only. Refer to installation section for specification of components labelled in the details.*


## 1. Slab Detail

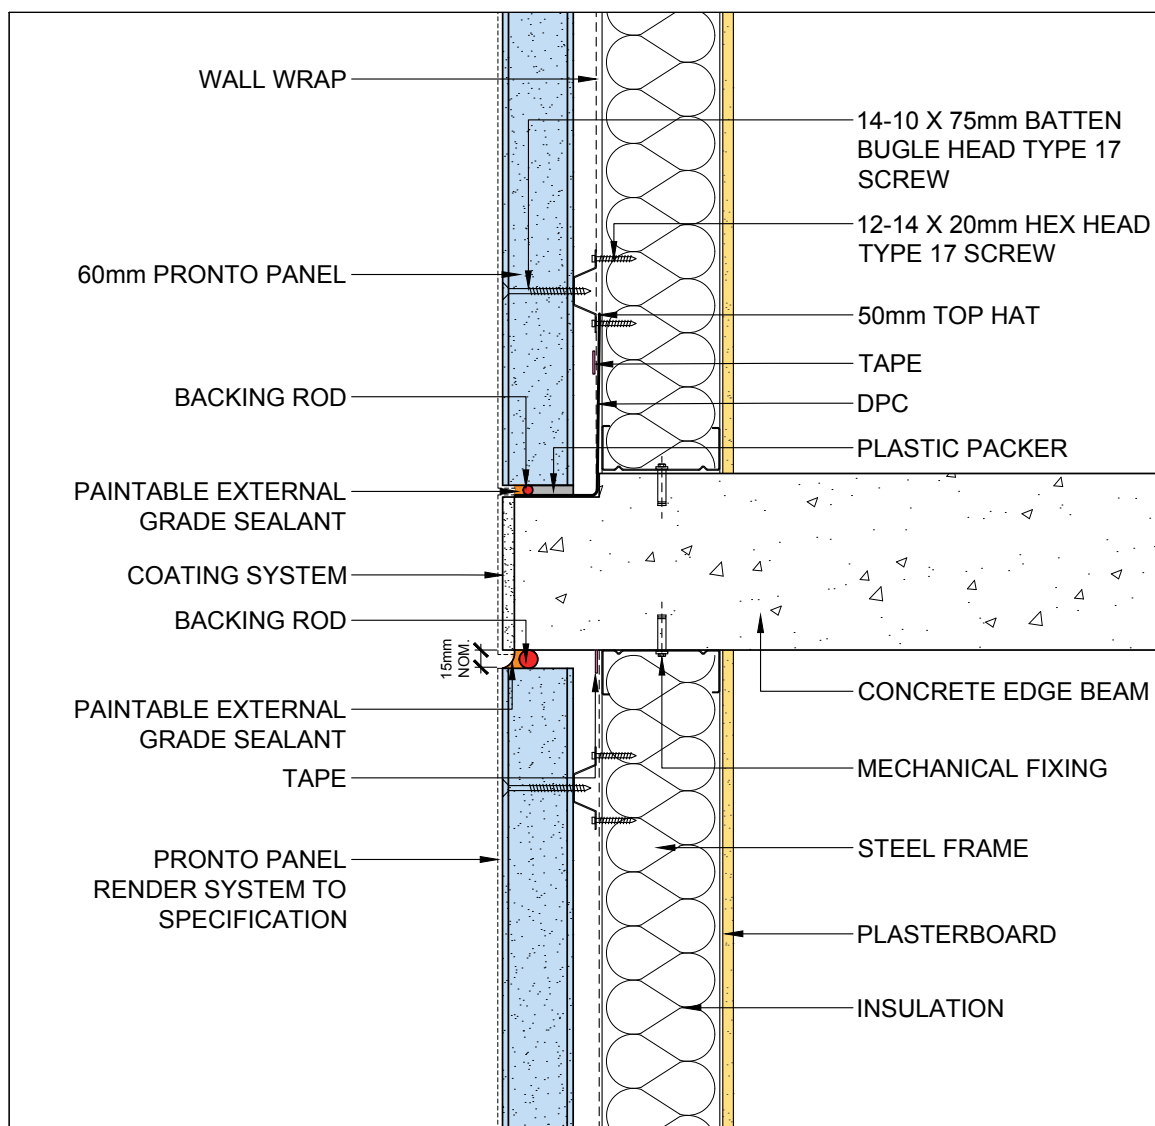

Exposed Slab Detail.

# System Details

## 1. Slab Detail

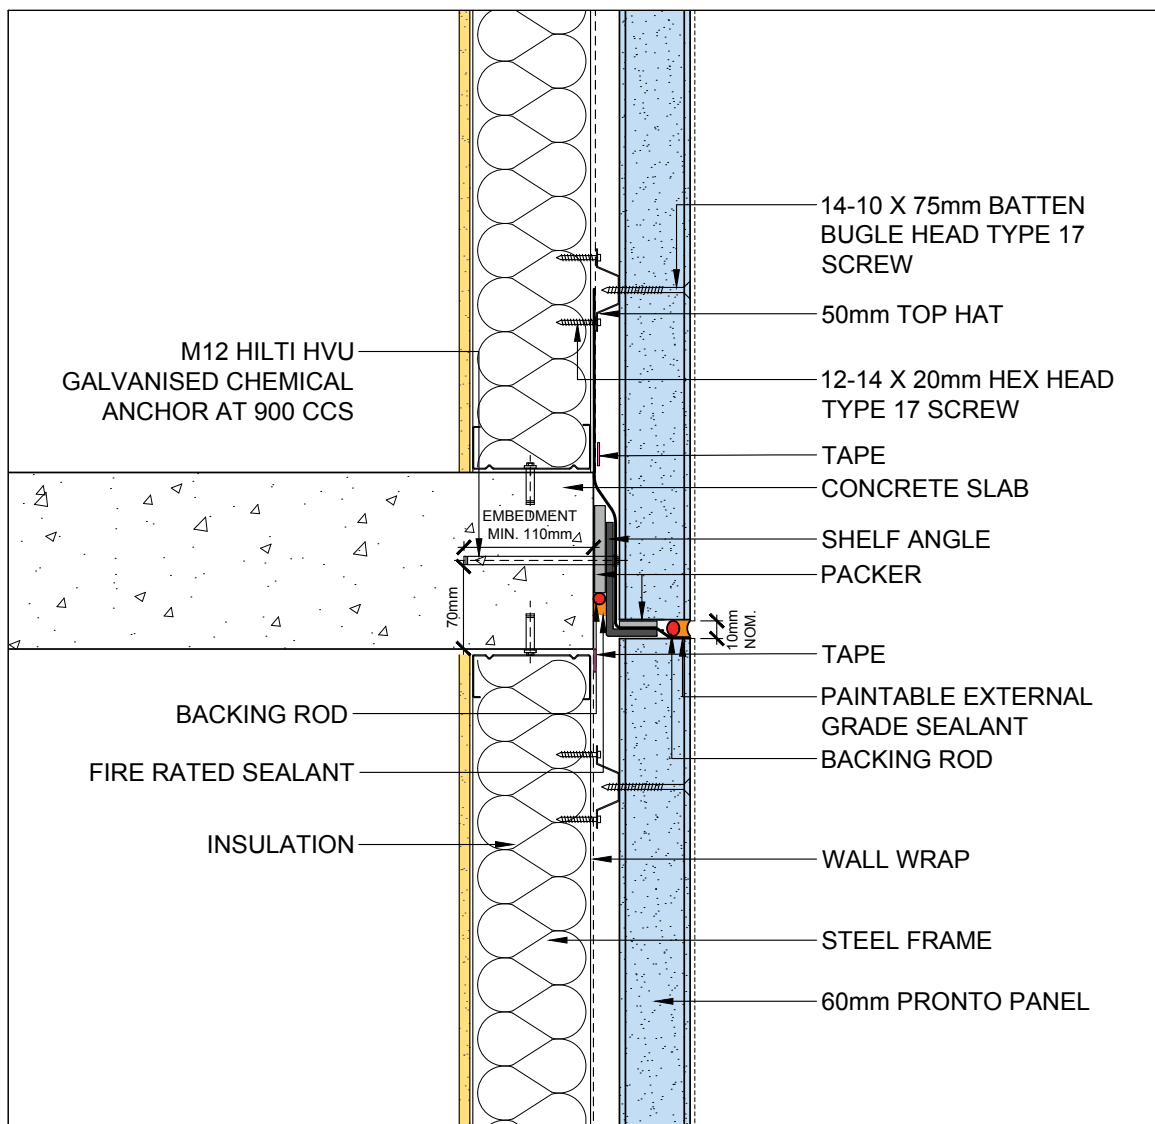


Unexposed Slab Detail.




## System Details

### 2. Window

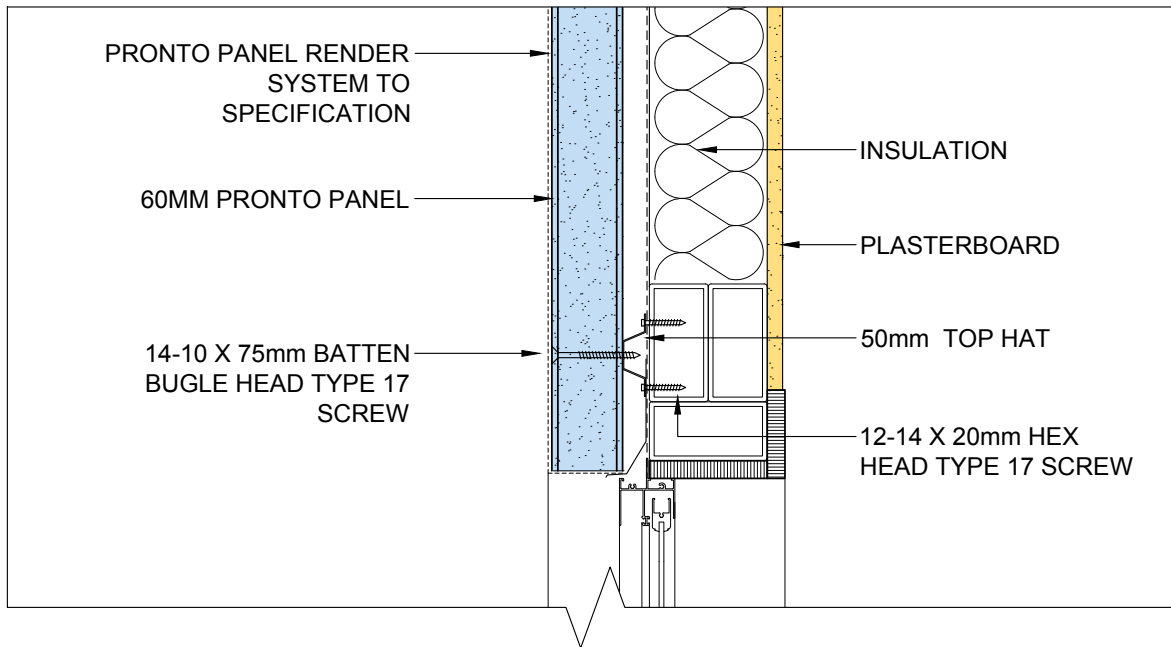


Head Detail.

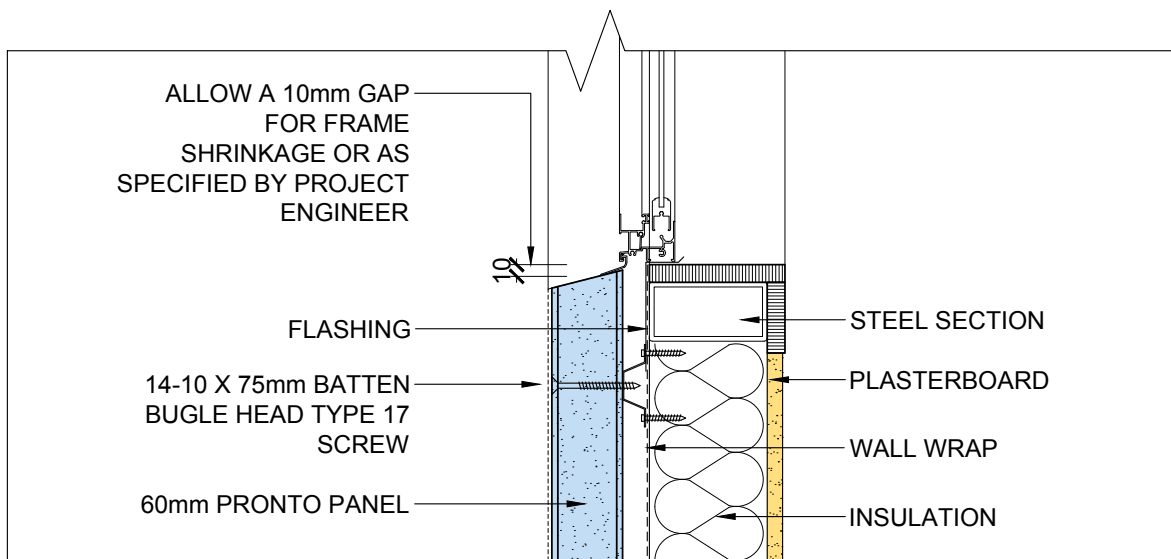


Sill Detail Option 1.

# System Details

## 2. Window

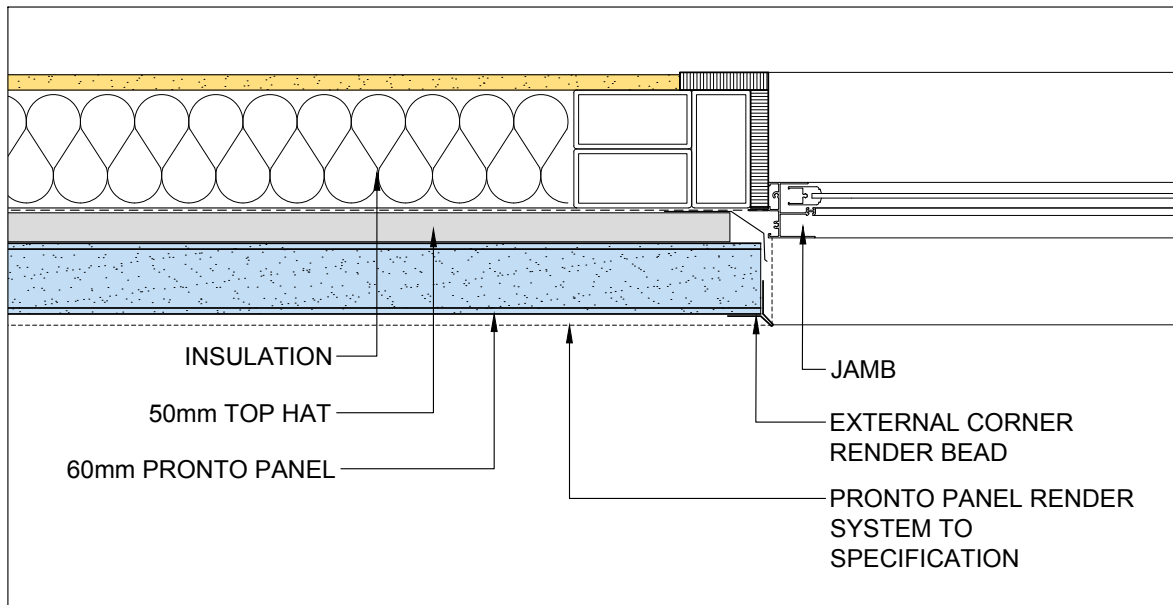


Jamb Detail.

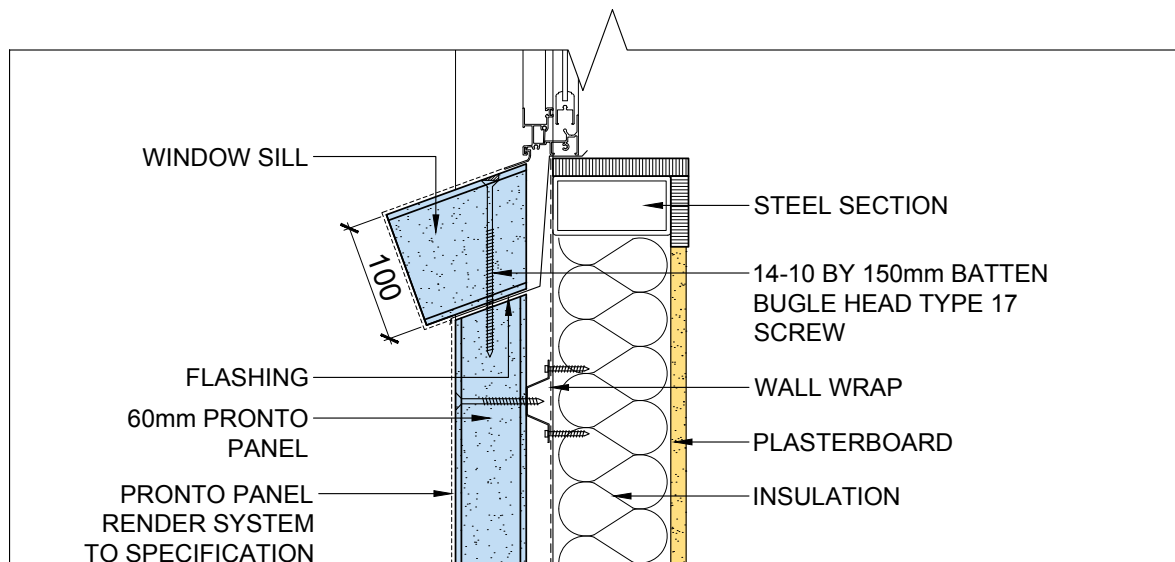


Sill Detail Option 2.

## System Details

### 3. Sliding Door

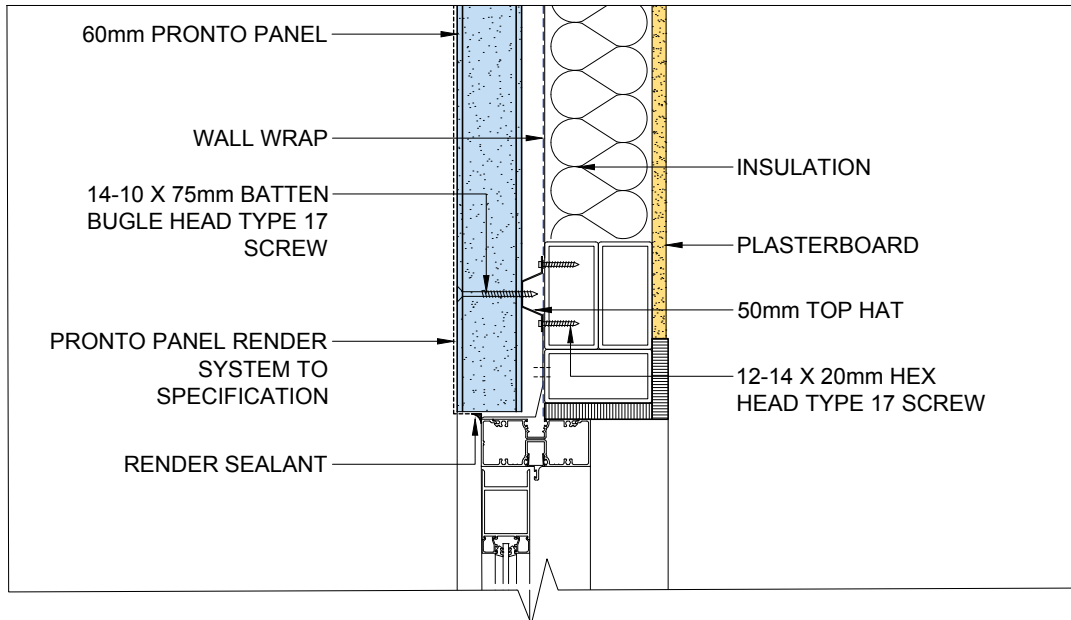


Head Detail

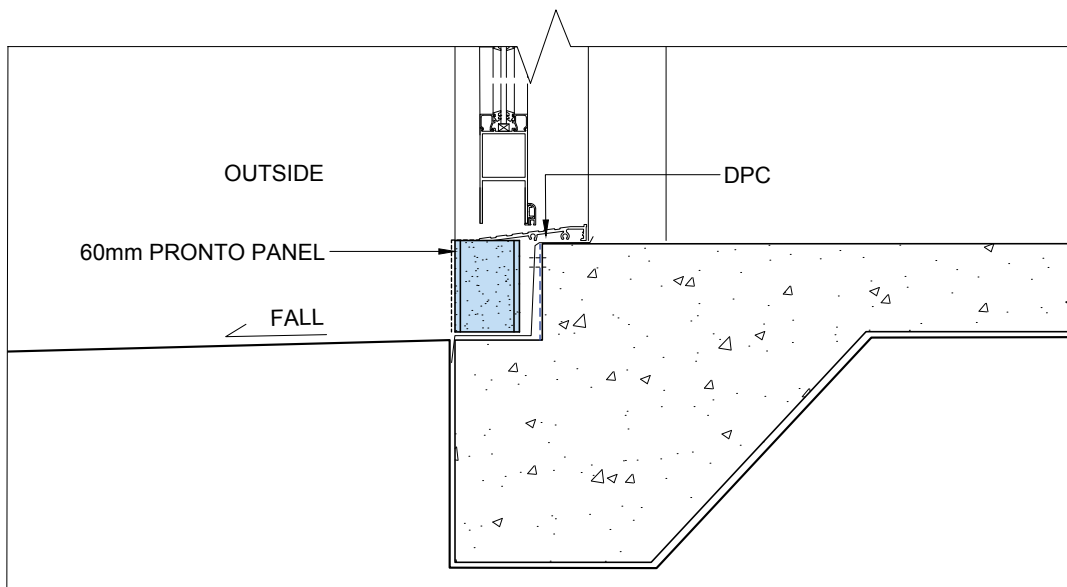

Sill Detail

# System Details

## 3. Sliding Door

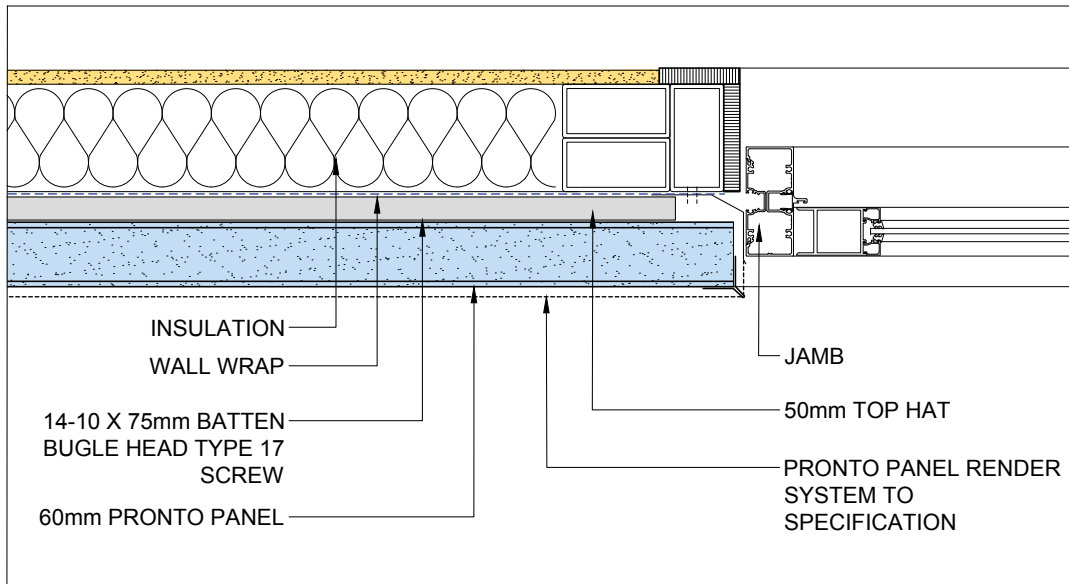


Jamb Detail



## System Details


### 5. Door

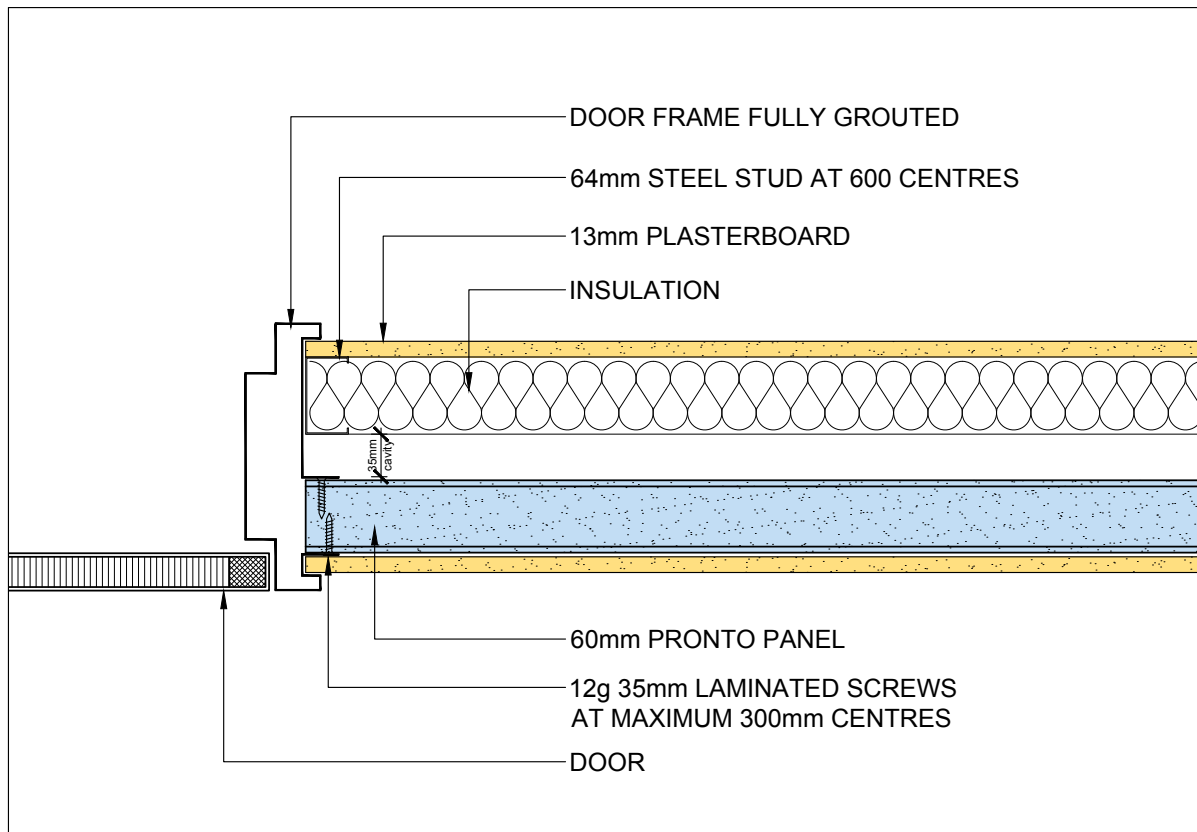

Door Detail Option 1

## System Details

### 5. Door

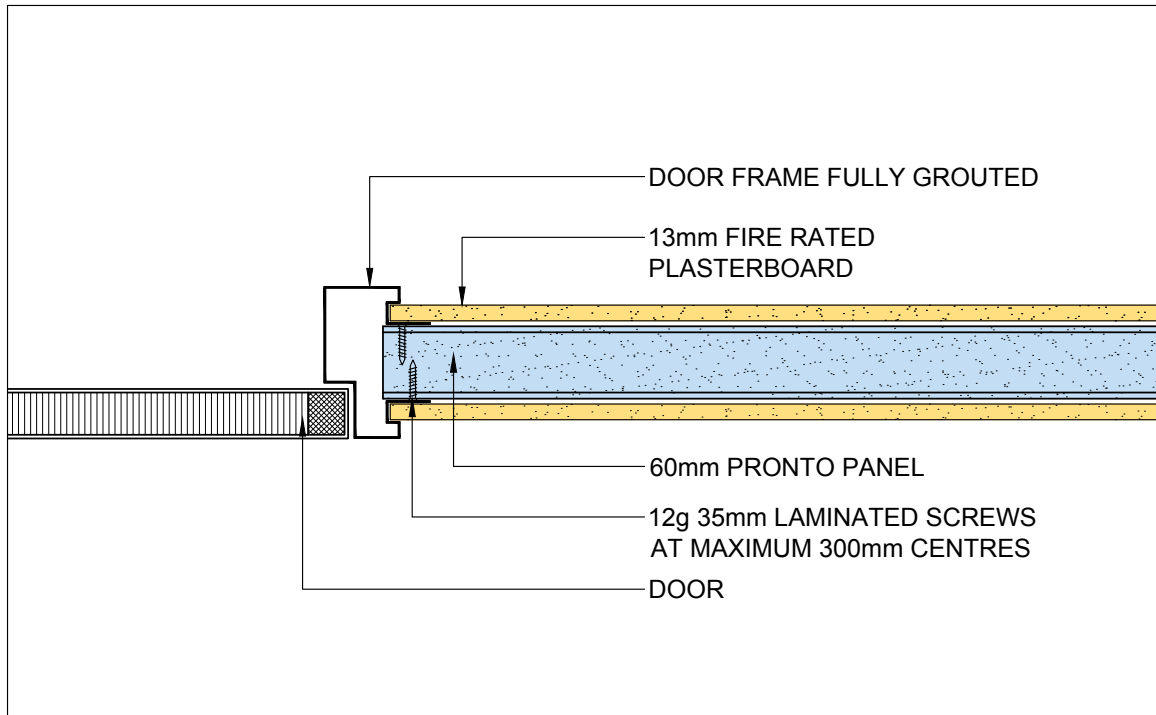


Door Detail Option 2


Pronto Panel Technical Manual

# System Details

## 6. Corners

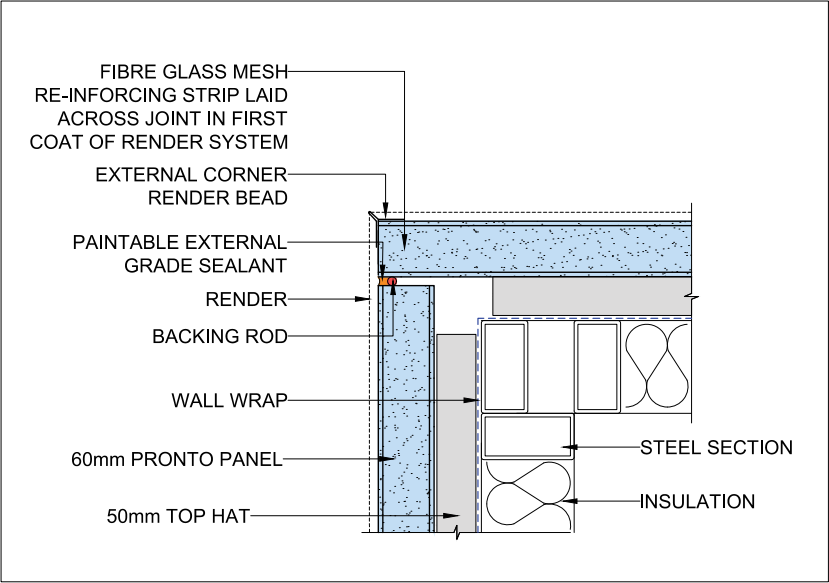


External Corner Detail Option 1.

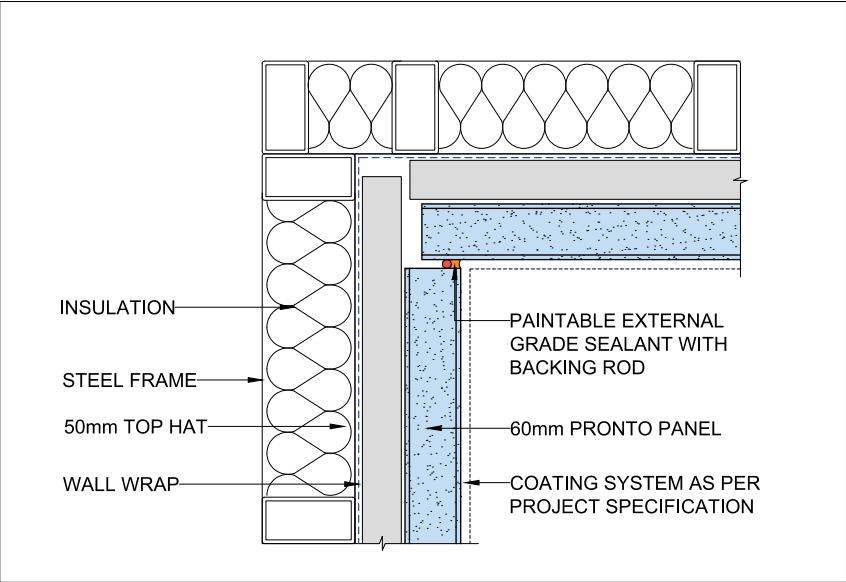


Internal Corner Detail Option 2.

## 7. Balcony

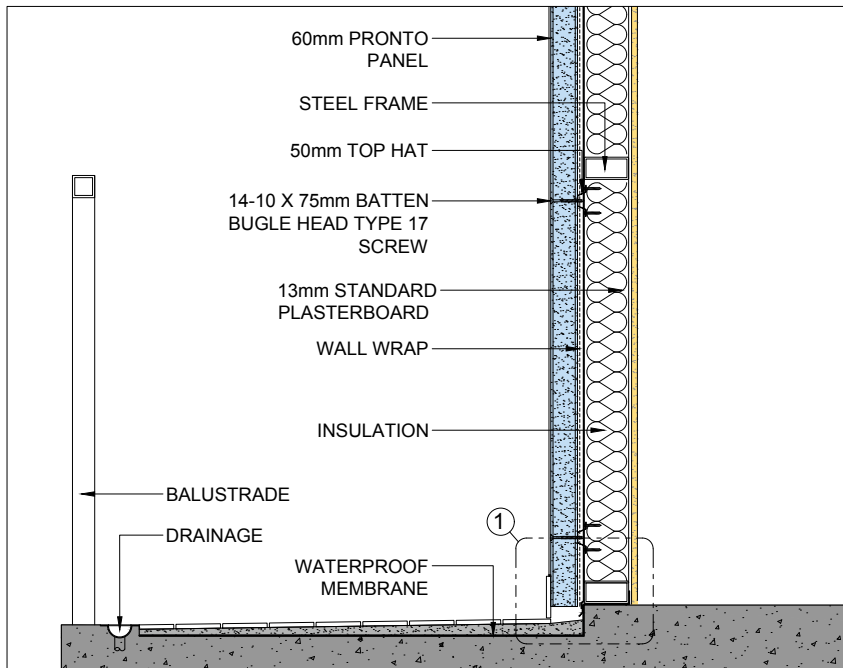

Balcony Detail.

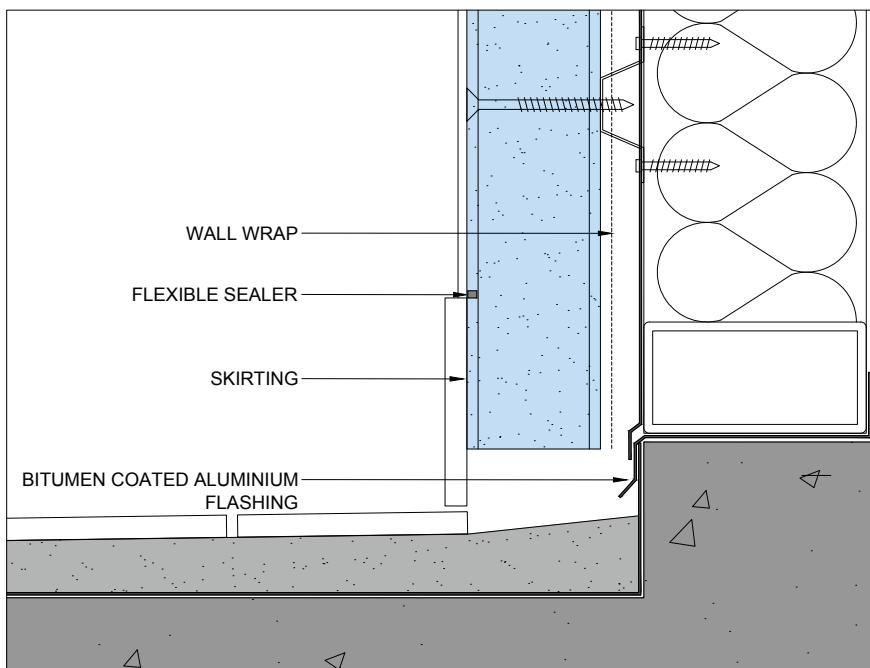


Flashing Detail.




## System Details

### 8. Penetration

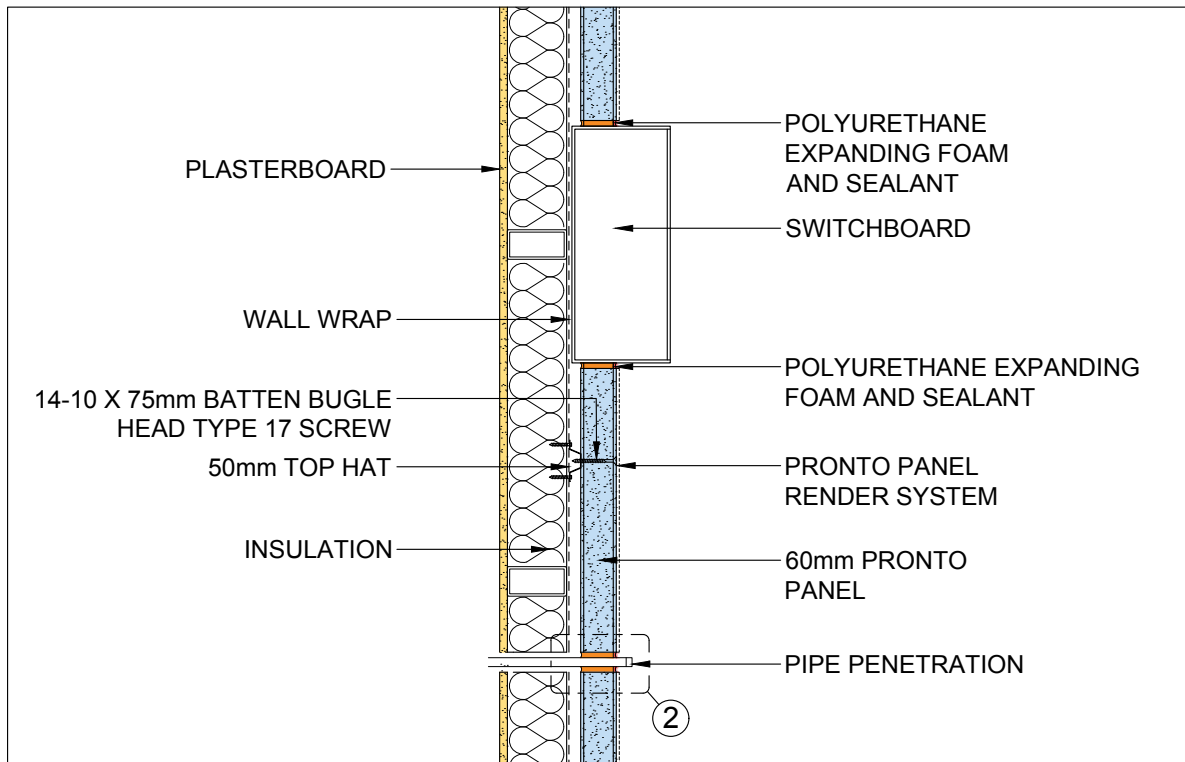


Switchbox Detail.

## 8. Penetration

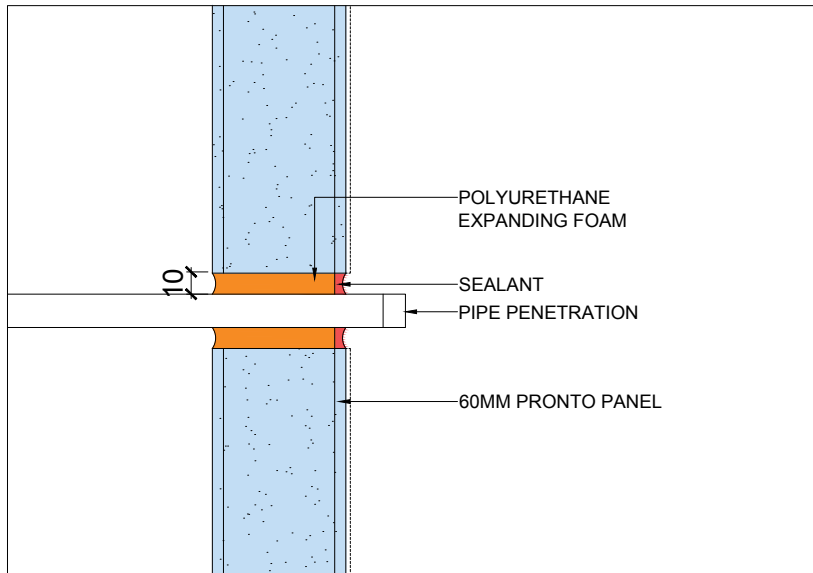


Pipe Penetration Detail.

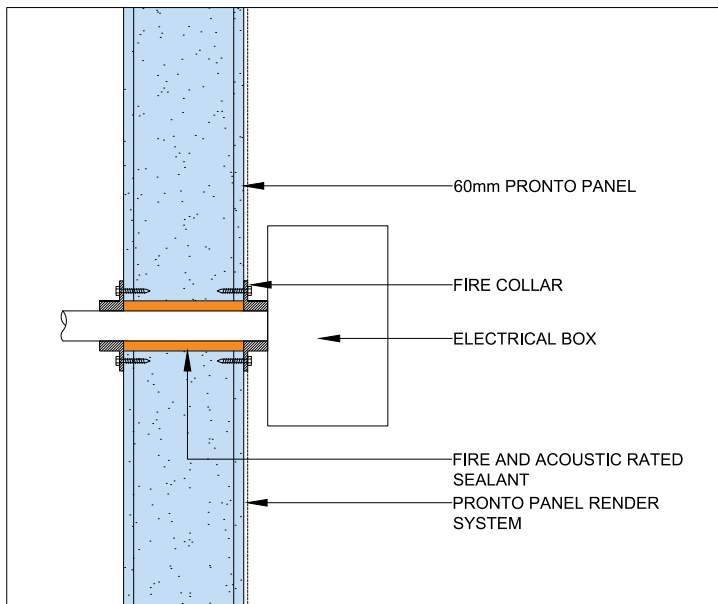


Electrical Box Detail

## System Details

### 9. Control Joint

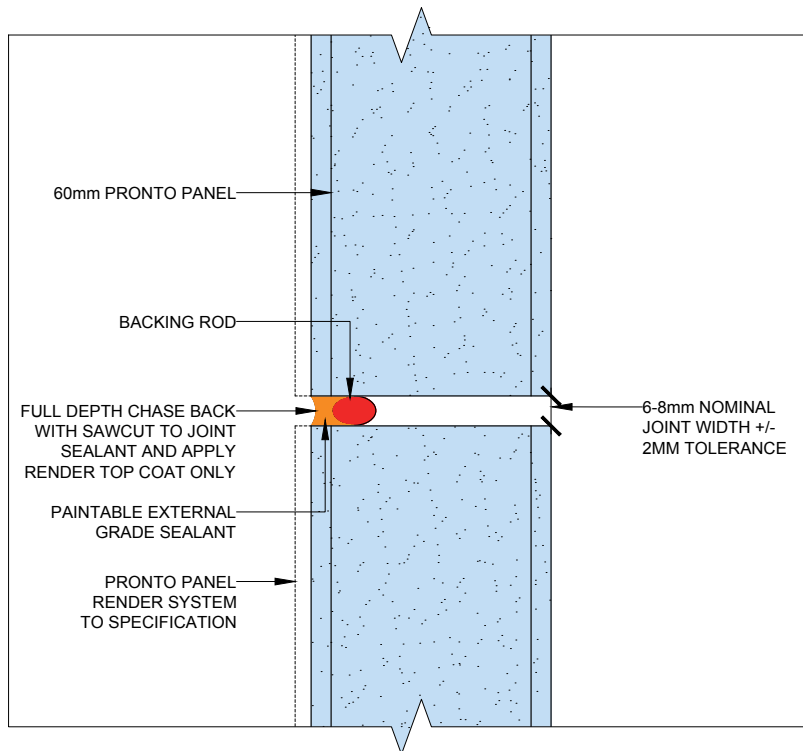


Horizontal Render Cut.

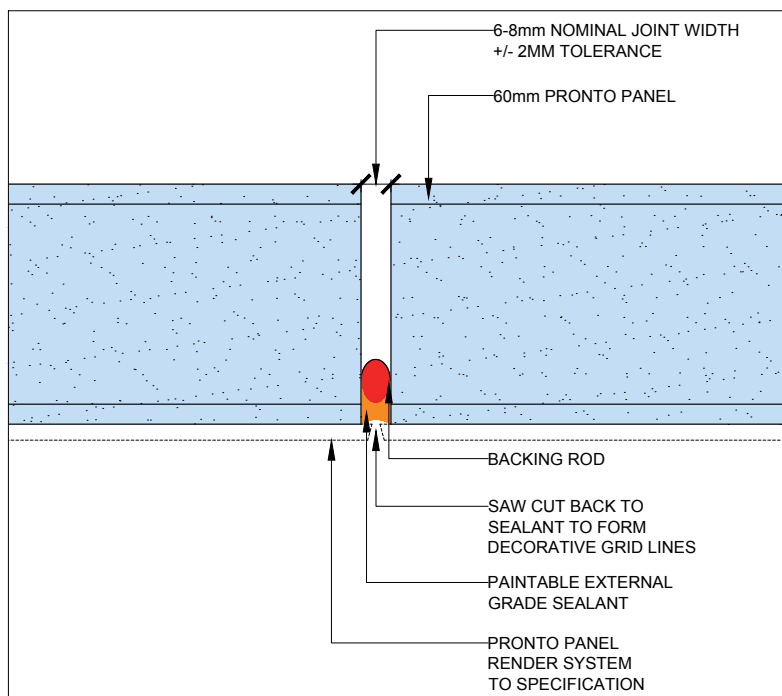

Vertical V-Groove.

# System Details

## 10. Parapet

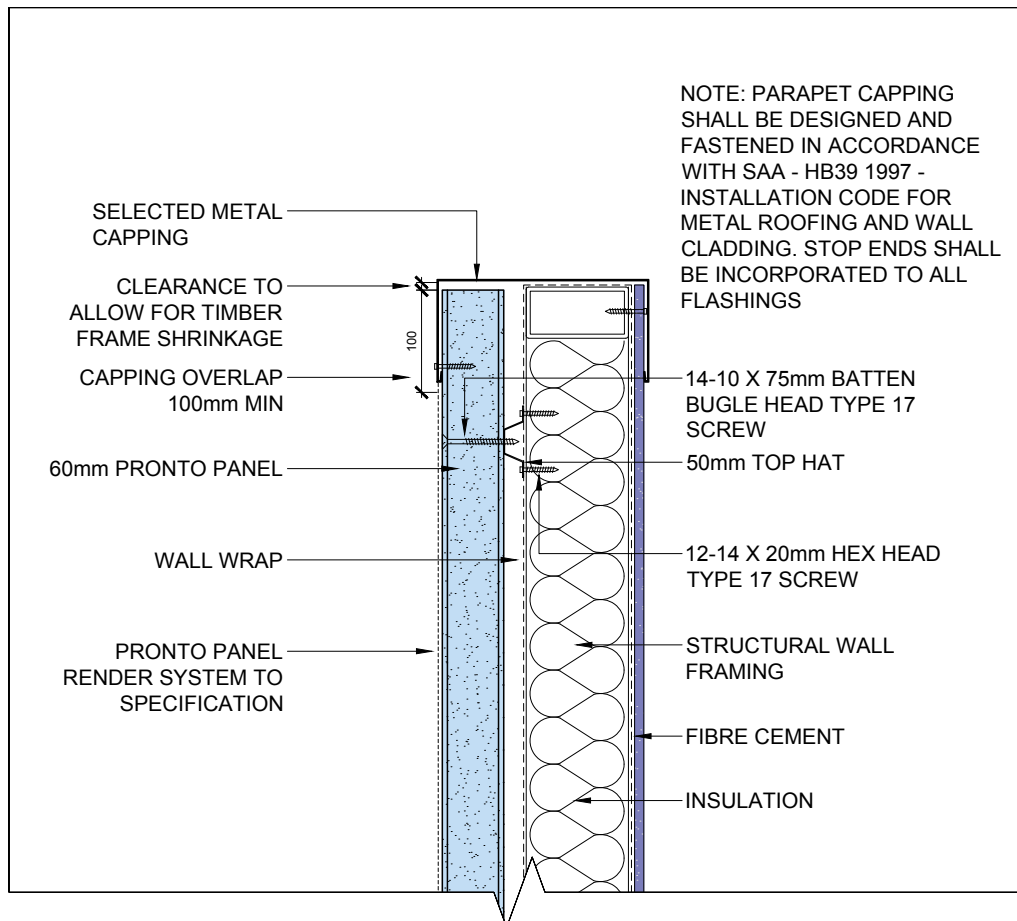

Parapet Detail



# Pronto Panel Installation Details



# Delivery on Site

## Delivery on Site

Pronto Panels are wrapped and strapped on pallets for delivery to site. Each pallet, containing 12 panels, is loaded by forklift onto trucks for delivery.

Pronto Panel can be unloaded either by forklift or a boom crane. The panels must be stored on site in areas where they will not be immersed in pooled water and clear of possible damage that could be caused by site movement and construction. The packs of Pronto Panels come wrapped with plastic sheeting and should remain covered during site storage.

Pronto Panel Adhesive bags are plastic wrapped and packaged on a pallet and must be stored in dry conditions. Shelf-life of Pronto Panel Adhesive is 12 months.



## Pronto Panel Safety

### 1. Panel Content

Pronto Panel contains no toxic or volatile components. While the product contains polystyrene aggregates, they are coated with sufficient cement based matrix that they do not burn or emit dangerous volatile compounds in a fire situation.

### 2. Cutting/Drilling

Cutting or drilling the panels will liberate dust which must be controlled by suitable means. A suitable saw is a Makita 5057KB 1400W 185mm (7-1/4") Fibre Cement Dustless Circular Saw. It should be attached to an appropriate dust extraction system for minimal dust generation whilst cutting.

### 3. Pronto Panel Adhesive

The Pronto Panel Adhesive contains both cement powder and fine sand. This may constitute a hazard during use. Suitable respiratory protection, eye protection and hand protection must be worn when using this product.

### 4. Safe Handling of Pronto Panel

Pronto Panel weighs between 85 and 95kg, depending on length. We recommend the use of a cradle trolley to transport the panels from the pallet to the worksite. If a Pronto cradle trolley is not available the panels may be transported flat on a pallet jack or similar.

The panels do not have to be completely lifted into place for installation. The panels are to be placed with the base on the floor and the top end raised to meet the slotted angle. This reduces the load to be lifted and allows two operators to rotate the panels into position.

Safety Data Sheets for these products are available from the Pronto Panel website  
**[www.prontopanel.com.au](http://www.prontopanel.com.au)**  
or by contacting  
**13 PANELS (13 726 357)**

Please see the installation section for full details of installation.

# Installation

## 1. System Components

### Pronto Panel

Pronto Panel comes in various lengths.

Panel size (mm) ( L x W x T)	Dimensional Tolerance (mm)	Mass (kg)	Mass Tolerance (kg)
2,440 x 610 x 60	±5	77	±5
2,700 x 610 x 60	±5	85	±5
2,850 x 610 x 60	±5	90	±5
3,000 x 610 x 60	±5	95	±5



### Pronto Panel Adhesive

Pronto Panel Adhesive (supplied in 20kg bags) is used to fill in the cavity between adjacent Pronto Panels.




## 2. Fixings (not supplied by Brickworks)

### Pronto Panel to building frame

24mm or 50mm top hats are fixed to the building frame. Pronto Panel is then fixed to the top hats.

The top hats are G550, Z275 steel grade with minimum 0.42 BMT.



### Battens to building frame fixings

Galvanised 12-14 x 20mm Type 17 screws or equivalent are used to fix top hats to the building frame.



### Pronto Panel to top hat

14-10x75mm Type 17 Bugle Batten Screw with countersunk ribbed head and internal hex drive or equivalent are used to fix Pronto Panel to top hats. Do not use impact driver to fix screws to panels.





# Installation

## 3. Tools Required for Installation of the Pronto Panel System

- Chalklines for marking out wall element locations
- Electric drill mixer (recommended)
- Mixing buckets
- Trowel
- Grinder/steel cutting saw
- Electric screw gun
- Sealant gun and fire resistant acrylic sealant
- Davco Tile and Grout Cleaner
- Metal mechanical fasteners
- Electric power saw with diamond blade



## 4. Installer

Pronto Panel installation must be carried out by qualified panel installers.


No responsibility is taken for incorrect installations of Pronto Panel.




# Installation

## 5. Installation Procedures

### Unexposed slab

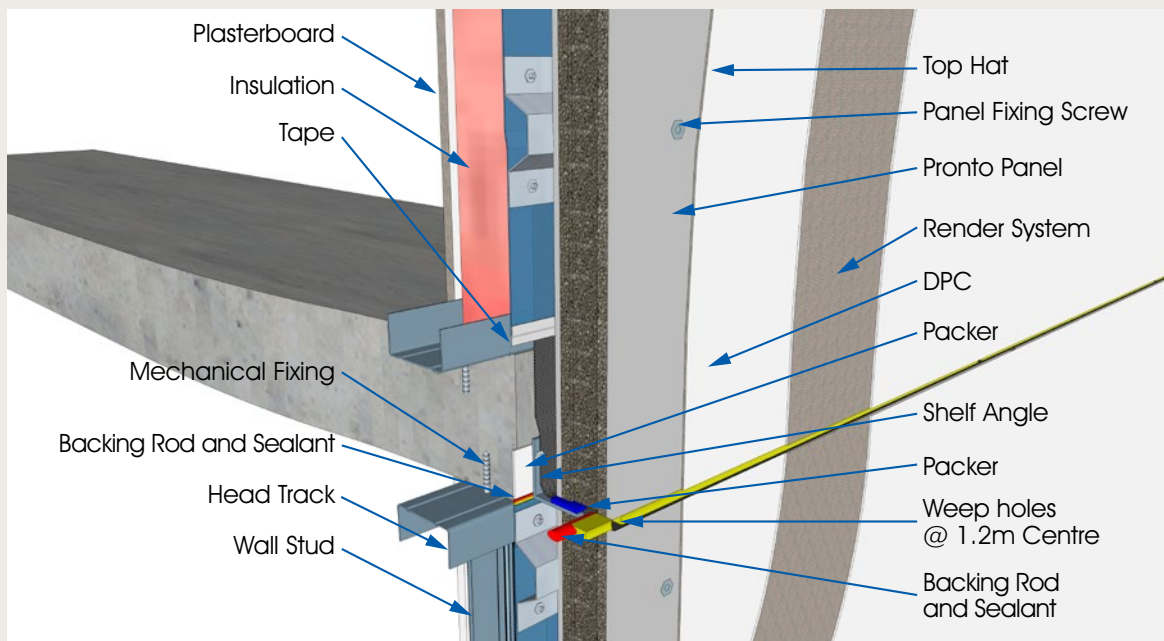

### Exposed slab

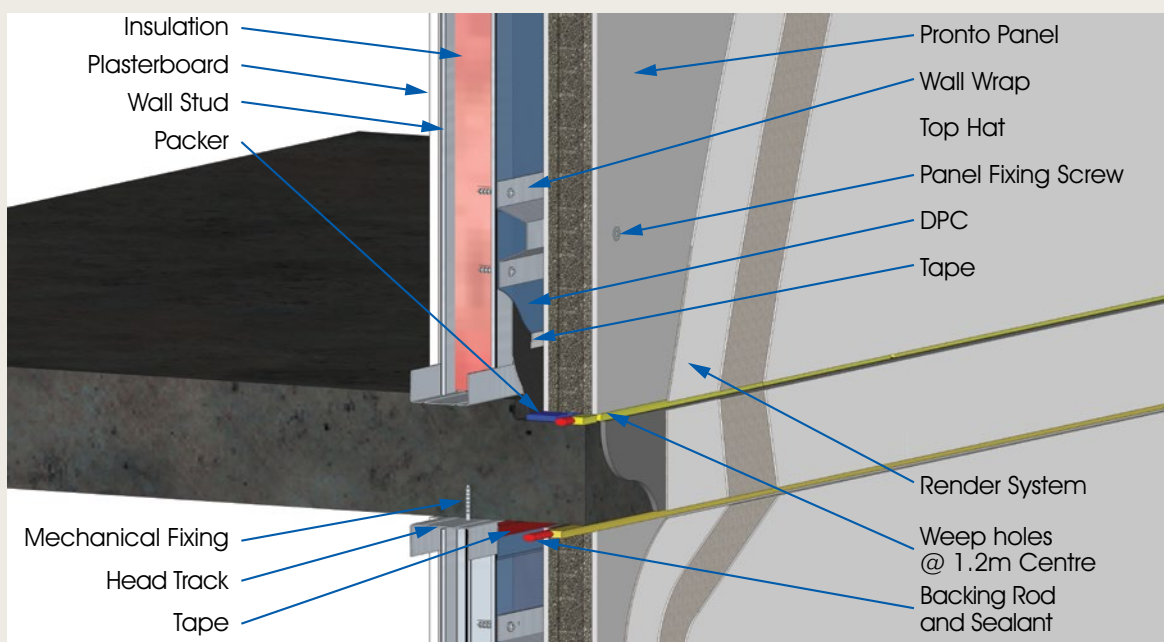

# Installation

## 5. Installation Procedures

### Shelf angle

When Pronto Panels are installed to cover floor slab, metal shelf angle is used to provide support during installation. The project engineer is responsible for determining the dimensions and durability of the shelf angle as well the connection systems associated with the shelf angle.

### Fixing top hats to frame

Check the number of top hats required. Install the top hats above and below openings. Top and bottom top hats are to be installed maximum 250mm from the end of Pronto Panel. Ensure top hats are discontinuous at control joints.

### Install Pronto Panel

To minimise cutting on site, plan out panel layouts, take into account openings and penetrations.

It is good practice to start the installation of the panel from the corner of the building.

Check the number of screws required. Fix Pronto Panels to top hats using 14-10x75mm Type 17 Bugle Batten Screw with countersunk ribbed head.

Ensure screws are countersunk into panel and are covered by adhesive. Apply Pronto Panel Adhesive to vertical joints. Install next panel.

Check control joint layout

If the building is within 100m of non-surf coastline or 1km of surf coastline, all fixings are to be upgraded to R4 or 304/316 stainless steel.

### Penetrations

Where possible all penetrations through Pronto Panel walls should be treated as per window detail, incorporating flashing tape and polyurethane sealant. This is particularly important for electrical meter boxes and the like. Extra mesh tape is required around the penetration for added reinforcing during the render process.

### Weep holes

Weep holes allow any moisture that does enter the cavity of the Pronto Panel system to be able to exit. Weep holes are created by 30mm wide breaks within the line of sealant and backing rod. Ensure that weep holes are no more than 1.2m apart.




# Installation

## 5. Installation Procedures

### Mixing Pronto Panel Adhesive

The Pronto Panel Adhesive is a two-part thin bed adhesive mix. For the best results the use of an electric drill mixer (900W electric drill, Festo or the like) is recommended.

Typical adhesive coverage rate is 40m<sup>2</sup>/20kg bag if the adhesive is used immediately. Follow the steps below for mixing of the adhesive:

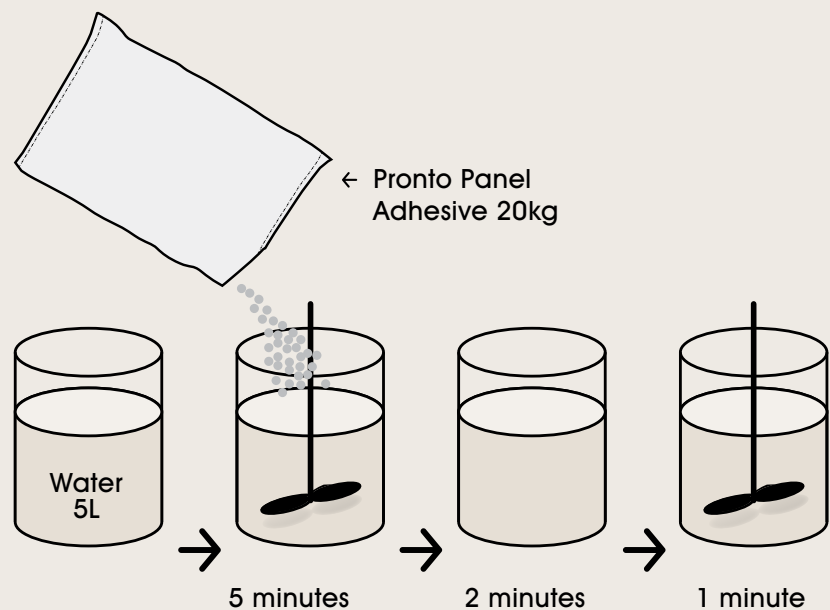

Slowly add the contents of the 20kg bag of adhesive to 5 litres of water while stirring continuously. Continue stirring until the consistency is smooth. Leave mixture for 2 minutes to allow for hydration before mixing again for another minute. The adhesive has a pot life of 2 hours at 25°C.



**CAUTION:** For handling of adhesives, personal protection such as safety glasses to AS1337 and chemical gloves must be worn. P1 or P2 dust mask is also recommended. Please refer to the SDS for more details.



# Installation

## 5. Installation Procedures

### Control Joints

Control joints should be placed at every 6 meters and at points of stress concentration. Examples of these locations are listed below:

- At changes in height or thickness of wall
- Near door and window openings
- Near corners and intersecting walls

Control joints must be filled with appropriate sealant and backing rod.

Consult engineer and architect to determine the width and locations of control joints.

See system details on control joints.

Consult engineer and architect to determine the need for control joints.

### Coating System

A number of rendering systems have been specifically engineered to be used with Pronto Panel. Depending on the project, aesthetic requirements and budget, specifications are available from select coating system manufacturers to suit Pronto Panel.

All systems must be applied in accordance with guidelines as outlined by the coating system manufacturer and as per the relevant Product Data Sheets and specification.



Details of the preferred coating systems can be found on [www.prontopanel.com.au](http://www.prontopanel.com.au)

## Warranty

Our tradition, experience and financial strength have made Brickworks Building Products the first choice for many architects, builders and designers. Brickworks Building Products continued commitment to quality and innovation ensures that our products will remain the benchmark for excellence for many years to come. Pronto Panel has a warranty of 15 years as per Brickworks Building Products' Warranty.

Pronto Panel  
has a Warranty  
of **15 years**



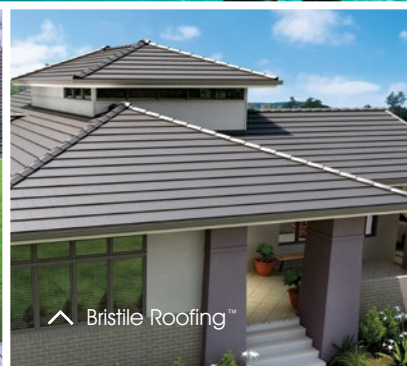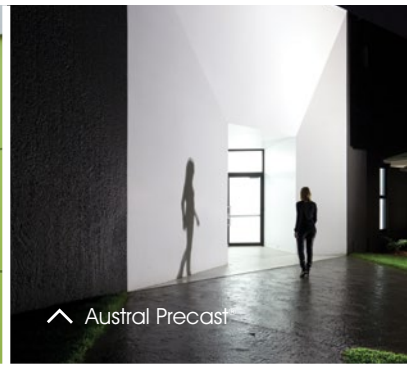

## Products and brands available from Brickworks Building Products™

Brickworks Building Products™ is one of Australia's largest and most diverse building material manufacturers. Under the Brickworks Building Products™ umbrella are some of Australia's best known building materials brands.

Our products include bricks, pavers, masonry blocks, retaining wall systems, precast concrete panels, concrete and terracotta roof tiles, timber products and specialised façade systems.

With a broad product portfolio and manufacturing and sales facilities across Australia, Brickworks Building Products™ is uniquely placed to service the demands of the building industry.

With over 1,200 staff across Australia and New Zealand, we pride ourselves on our commitment to product and service excellence and our leadership position.

The range of building products from  
**BRICKWORKS**  
BUILDING PRODUCTS

**australbricks**  
SINCE 1902

**australprecast**

**australmasonry**

**bristilerooting**

**auswesttimbers**

**Pronto Panel**  
FASTER. BETTER. STRONGER.

**terracade**  
TERRACOTTA FACADE SYSTEM

**DANIEL ROBERTSON**

**nubrik**  
ADVANCED STRUCTURE

**BOWRAL**

**BOWRAL BRICKS**

## Pronto Panel Head Office National

62 Belmore Road  
Punchbowl NSW 2196

### Trading hours

For trading hours please call  
13 PANELS (13 726 357)

# Pronto Panel™

13 PANELS (13 726 357)

Email: [sales@prontopanel.com.au](mailto:sales@prontopanel.com.au)

[www.prontopanel.com.au](http://www.prontopanel.com.au)



proud supporters



The range of building products from  
**BRICKWORKS**  
BUILDING PRODUCTS

**australbricks**  
Since 1988  
Pronto Panel  
FASTER. BETTER. STRONGER.

**australprecast**  
**terracade**  
TERRACOTTA FACADE SYSTEM



**australmasonry**  
**nubrik**  
NATURAL FINISH

**bristiler roofing**  
 BOWRAL BRICKS

**auswesttimbers**